

MDE/MDG17MN

MAYTAG® COMMERCIAL
SUPER-CAPACITY DRYER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



FOR YOUR OPERATION:

- Turbo Vent™ — Better Performance On Long Vents
- Extra-Large 7.4 cu. ft. Capacity
- Easy-To-Operate Dial Controls
- High Air Flow For Better Clothes Care
- Front Access For Easier Self Service
- Large-Capacity Metal Mesh Lint Filter
- Machine In Use Light

BUILT-TO-LAST™ FEATURES:

- Premium Porcelain-Enamel Top
- Four Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- Reliable Electro-Mechanical Controls
- Best Warranty in the Business

FASTER DRYING
WITH
TURBOVENT™

LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.

www.maytagcommerciallaundry.com




MDE/MDG17MN MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

Maytag® Super-Capacity Dryer

MECHANICAL NON-COIN

DRYER SPECIFICATIONS	
MODEL	MDE/MDG17MN
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	1/3 (.25)
CAPACITY	
Cu. ft. (liters)	7.4 (209.5)
AIRFLOW	
Gas models — cfm (cmm)	230 (6.5)
Electric models — cfm (cmm)	215 (6.1)
TUMBLE SPEED	
RPM	51.5 ± 3
ELECTRICAL REQUIREMENTS	
MDE model — voltage	240V/60Hz
MDG model — voltage	120V/60Hz
Export models — voltage	220-240V/50Hz
BREAKER/FUSE REQUIREMENTS	
MDE model — amps	30
MDG model — amps	15
MDE export model — amps	20
MDG export model — amps	10
APPROXIMATE OVERALL DRAW	
Domestic models — watts	6,000
Export models — watts	5,000
EXHAUST DUCT DIAMETER	
In. (mm)	4 (101.6)
ELECTRONIC BURNER IGNITION	
MDG models	•
GAS RATING	
MDG model — BTU/hr. (kcal/hr.)	24,000 (6,048)
GAS INLET	
MDG model — in.	3/8 N.P.T.
AUTOMATIC PRESSURE REGULATOR	
MDG models	•
ADJUSTABLE LEVELING LEGS	
MDG models	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	152 (69)
Uncrated — lbs. (kg)	138 (62.6)

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

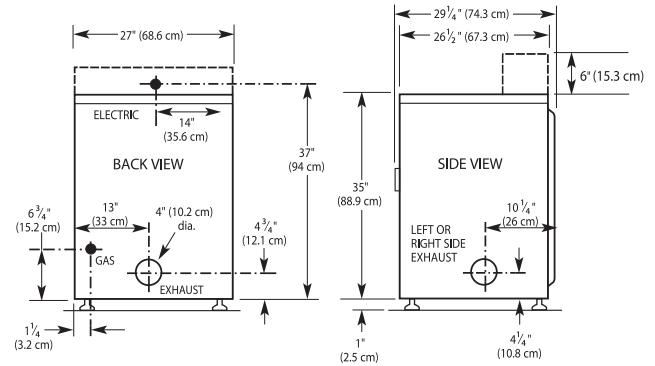

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)

Number Of 90° Turns	Flexible Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	76 ft. (23.2 m)	62 ft. (18.9 m)
1	71 ft. (21.6 m)	57 ft. (17.4 m)
2	67 ft. (20.4 m)	53 ft. (16.2 m)
3	65 ft. (19.8 m)	51 ft. (15.6 m)
4	63 ft. (19.2 m)	49 ft. (14.9 m)



NEW YORK CITY M.E.A.



BEAB Approved

WARRANTY DETAILS

- From the Date of Original Purchase, through the times listed below, the designated parts which fail in normal commercial use will be repaired or replaced free of charge.
- Chemical Damage is Excluded From ALL Warranty Coverage.
- All Parts - Two Years From the Date of Purchase
- Labour - One Year

GOODER EQUIPMENT CO. LTD.

Sole NZ Agent & Importer

Wellington
04-566 9124

Auckland
09-415 3581

Christchurch
021 319 945

Hamilton
0274 413 734